JILONG
Since 1993



VFL-11

Back clip design

Mini Visual Fault Locator

MiNi
Compact

SC
FC
ST
2.5mm universal

USB Charging
(Dry cell type can not charge)

LED light


- Pocket size design,mini and compact
- Rubber dustproof cover
- Testing distance is up to 25km,high stability
- 2.5mm universal connector,suitable for SC/ST/FC connector
- Strong and stable light source, strong penetrating power
- Be equipped with LED light,more convenient to work in the dark
- Built-in lithium battery,safe to use USB charging, convenient usage

Products Features





Testing distance is up to 25km

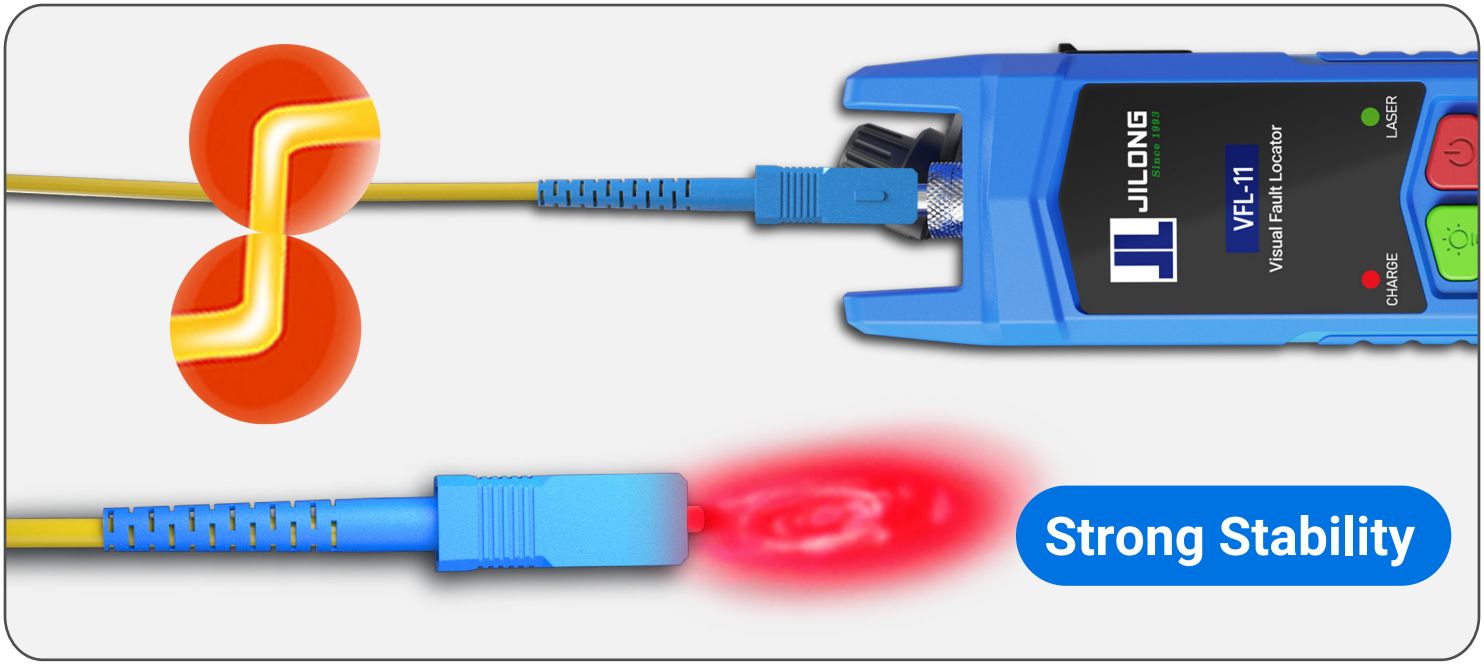

2.5mm universal connector



SC



ST



FC

Products display









Products specification

Instrument Model	VFL-11-10		VFL-11-20		VFL-11-30	
	Dry cell	Li-ion	Dry cell	Li-ion	Dry cell	Li-ion
Power Range	10mW	10mW	20mW	20mW	30mW	30mW
Test Distance	5-8km	5-8km	12-15km	12-15km	20-25km	20-25km
Wavelength Range	650nm					
Laser Type	LD					
Modulation Frequency	CW / 2Hz					
Operating Temperature	-20 ~ +60 (℃)					
LED Flashlight	Supported					
Power Supply	2 × AAA 1.5V batteries / 800mAh lithium battery					
Charging Port	USB port (rechargeable version only)					
Dimensions	127 x 36.5 x 28 (mm)					
Weight	61g (including batteries)					

* All data above were obtained under laboratory conditions at 20°C

Contact us

Nanjing Jilong Optical Communication Co., Ltd

Add: No. 8, Huyue East Road, Longchi Street, Liuhe District, Nanjing, China

Web: www.JILONGOT.com

Mail: info@jilongot.com

TEL: +86 400 883 6695

Visit our official website for more