JILONG
Since 1993



VFL-11P

Pen Type

Visual Fault Locator

Metal material


2.5mm Universal interface

Pulsed and CW operation

Hidden button

- Metal material, small and practical
- Break-resistant silicone dust cap
- Strong and stable light source, strong penetrating power
- Testing distance is up to 25km, high stability
- 2.5mm universal connector, suitable for SC/ST/FC connector

Product Features

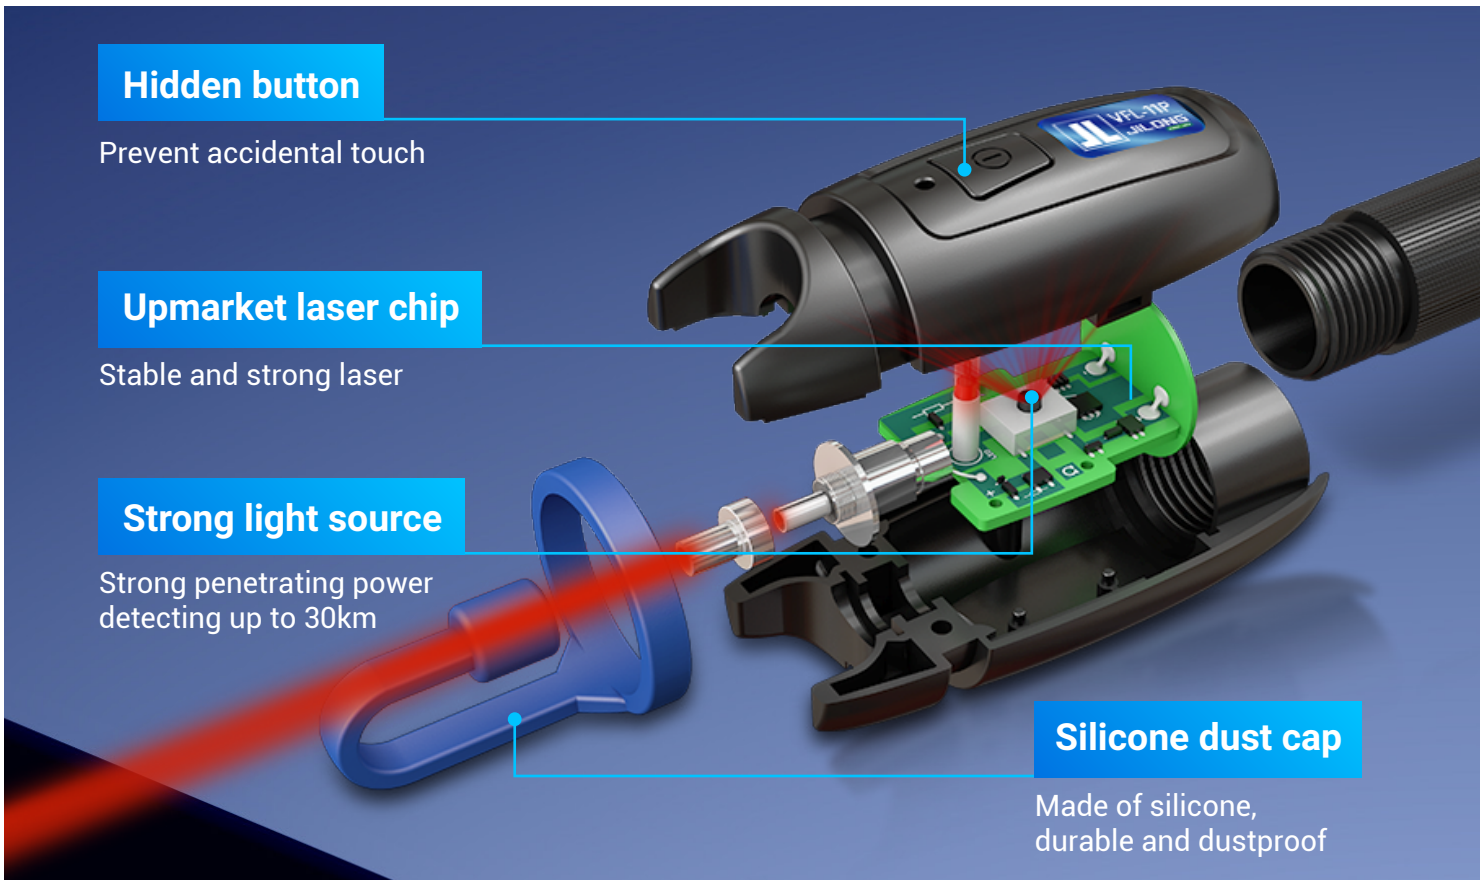

Silicone Dust Cap



Not easy to break

Effective dust prevention

2.5mm Universal Connector



SC



FC



ST

Product Display






Product Parameter

Model	VFL-11P-10	VFL-11P-20	VFL-11P-30
Output power	10mW	20mW	30mW
Detection distance	5-8km	12-15km	20-25km
Wavelength	650nm		
Laser type	LD		
Modulation frequency	CW / 2Hz		
Operating temperature	-20 ~ +60 (℃)		
Power	AA batteries x 2		
Dimensions	197 x 30 (mm)		
Weight	115g (Including batteries)		

* All data above were obtained under laboratory conditions at 20°C

Contact us

Nanjing Jilong Optical Communication Co., Ltd

Add: No. 8, Huyue East Road, Longchi Street, Liuhe District, Nanjing, China

Web: www.JILONGOT.com

Mail: info@jilongot.com

TEL: +86 400 883 6695

Visit our official website for more